

LED/Buzzer Combination with acknowledgement function

Patent approved



- LED permanent light with additional continuous tone
- Silence the audible signal by lightly pressing the frontal area
- Life duration up to 50,000 hrs
- Potential-free output for transmission of the acknowledgement signal to the control unit
- Positive and negative logic

TECHNICAL SPECIFICATIONS:



Dimensions (Diameter x Height):	49.5 mm x 75 mm
Housing:	PC/ABS-Blend
Dome:	PC, transparent
Connection:	Screwable connection max. 0.5 mm ²
Starting current:	< 0.5 A
Current consumption:	40 to 80 mA at 24 V
Signal input:	24 V=
Acknowledgement output:	Semiconductor-Relay $U_{max} = 30\text{ V}$ $I_{max} = 100\text{ mA}$ $R_{ON\ max} = 25\text{ Ohm}$
Tone type:	Continuous
Tone frequency:	c. 2.8 kHz
Duty cycle:	100 %
Life duration:	up to 50,000 hrs
Fixing:	Installation mounting for $\varnothing 22,5\text{ mm}$ (M 22 x 1.5 mm) with anti-twist device


Life duration up to 50,000 hrs

Nut and seal included in assembly.

ORDER SPECIFICATIONS:

Voltage	24 V=
red	450 100 55
yellow	450 300 55


ADDITIONAL INFORMATION:

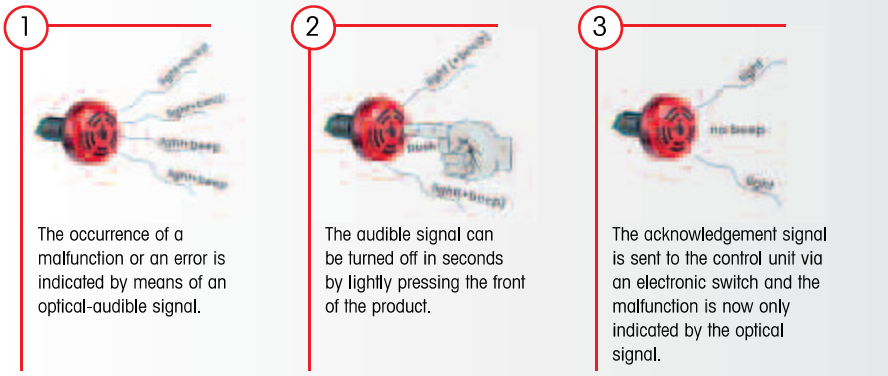

TECHNICAL DIAGRAMS:

see page 264

In preparation



This document was created with Win2PDF available at <http://www.win2pdf.com>.
The unregistered version of Win2PDF is for evaluation or non-commercial use only.
This page will not be added after purchasing Win2PDF.